



30x30x15mm

- Airflow: 3.8~6.1 CFM
- Static Pressure: 2.8~7.1 mm-H₂O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1571 #28 AWG
- Weight: 13 g

Model No.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Max. Airflow CFM	Max. Static Pressure mm-H ₂ O	Current mA	Power Consumption W	Life at 40°C L10 Hour	P-Q Curve	Noise Level dB(A)
NYW03015005BL	2B	05	4~5.5	7000	3.8	2.8	60	0.30	80000	4	<17.0
NYW03015005BM	2B		4~5.5	8000	4.4	3.7	85	0.425	80000	3	20.5
NYW03015005BH	2B		4~5.5	9000	4.9	4.4	110	0.55	75000	2	25.0
NYW03015005BS	2B		4~5.5	11000	5.7	6.3	200	1.00	65000	1	30.0
NYW03015012BL	2B	12	7~13.2	7000	3.8	2.8	30	0.36	80000	4	<17.0
NYW03015012BM	2B		7~13.2	8000	4.4	3.7	40	0.48	80000	3	20.5
NYW03015012BH	2B		7~13.2	9000	4.9	4.4	45	0.54	75000	2	25.0
NYW03015012BS	2B		7~13.2	11500	6.1	7.1	90	1.08	65000	1	30.0

2B: 2-ball bearing D: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S

Function Available

- 1 6 5 4 3 2 7 8 9 10 11 14 12 13

PERFORMANCE P-Q CURVE

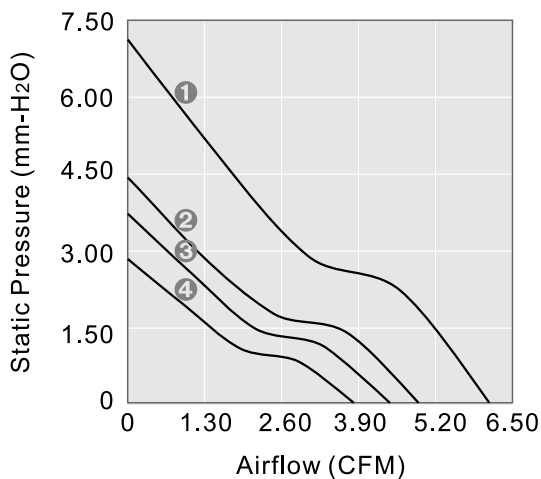

OUTLINE DIMENSIONS

