



40x40x10mm

- Airflow: 4.5~8.1 CFM
- Static Pressure: 2.0~5.4 mm-H₂O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #26 AWG
- Weight: 15 g

Model No.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Max. Airflow CFM	Max. Static Pressure mm-H ₂ O	Current mA	Power Consumption W	Life at 40°C L10 Hour	P-Q Curve	Noise Level dB(A)
YW04010005BL	2B	05	4~5.5	4500	4.5	2.0	90	0.45	8000	4	21.5
YW04010005BM	2B		4~5.5	5500	5.6	2.9	130	0.65	8000	3	26.5
YW04010005BH	2B		4~5.5	6500	6.6	4.1	170	0.85	7500	2	29.0
YW04010005BS	2B		4~5.5	7500	8.1	5.4	250	1.25	6500	1	34.5
YW04010012BL	2B	12	7~13.2	4500	4.5	2.0	55	0.66	8000	4	21.5
YW04010012BM	2B		7~13.2	5500	5.6	2.9	65	0.78	8000	3	26.5
YW04010012BH	2B		7~13.2	6500	6.6	4.1	90	1.08	7500	2	29.0
YW04010012BS	2B		7~13.2	7500	8.1	5.4	120	1.44	6500	1	34.5
YW04010024BL	2B	24	12~26.4	4500	4.5	2.0	50	1.20	8000	4	21.5
YW04010024BM	2B		12~26.4	5500	5.6	2.9	60	1.44	8000	3	26.5
YW04010024BH	2B		12~26.4	6500	6.6	4.1	70	1.68	7500	2	29.0
YW04010024BS	2B		12~26.4	7500	8.1	5.4	120	1.44	6500	1	34.5

2B: 2-ball bearing D: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S

Function Available

1 6 5 4 3 2 7 8 9 10 11 14 12 13

PERFORMANCE P-Q CURVE

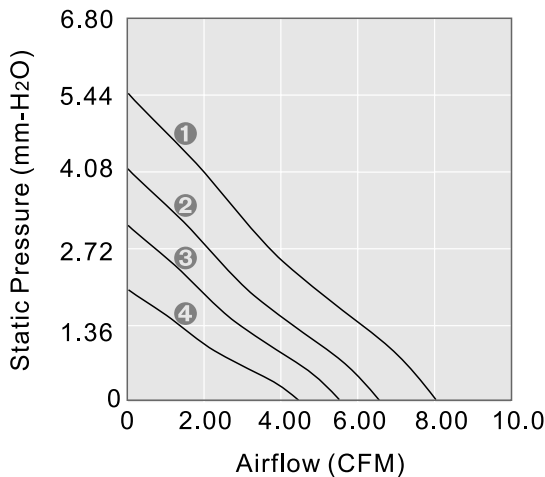

OUTLINE DIMENSIONS

