



# 40x40x15mm

- Airflow: 6.1~9.5 CFM
- Static Pressure: 4.6~8.7 mm-H<sub>2</sub>O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #26 AWG
- Weight: 26 g

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VDC	VDC	RPM	CFM	mm-H <sub>2</sub> O	mA	W	Hour		dB(A)
YW040150005BL	2B	05	4~5.5	6000	6.1	4.6	200	1.00	8.....	3	28.0
YW04015005BM	2B		4~5.5	7300	7.5	6.8	280	1.40	8.....	2	32.0
YW04015012BL	2B		7~13.2	6000	6.1	4.6	80	0.96	8.....	3	28.0
YW04015012BM	2B	12	7~13.2	7300	7.5	6.8	120	1.44	8.....	2	32.0
YW04015012BH	2B		7~13.2	8500	9.5	8.7	160	1.92	75.....	1	36.5

2B: 2-ball bearing D: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

**Voltage Available**

05 12 24 48


**Bearing System Available**

2B L S

**Function Available**

- 1 6 5 4 3 2 7 8 9 10 11 14 12 13

**PERFORMANCE P-Q CURVE**

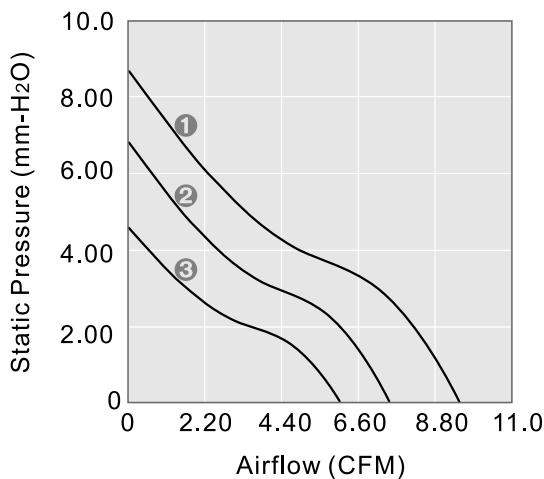

**OUTLINE DIMENSIONS**

