



60x60x10mm

- **Airflow: 17.3~23.3 CFM**
- **Static Pressure: 2.1~4.0 mm-H₂O**
- **Blade / Housing:**
Plastic Material UL 94V-0 P.B.T.
- **Lead Wire: UL1007 #26 AWG**
- **Weight: 26.0 g**

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level	
		VDC	VDC	RPM	CFM	mm-H ₂ O	mA	W	Hour		dB(A)	
YW06010005BL	2B	05	4~5.5	3800	17.3	2.1	260	1.30	8····	3	33.0	
YW06010012SL	S	12	7~13.2	3800	17.3	2.1	140	1.68	8····	3	33.0	
YW06010012SM	S		7~13.2	4500	21.0	3.0	170	2.04	8····	2	38.0	
YW06010012SH	S		7~13.2	52··	23.3	4.0	240	2.88	75···	1	41.0	
YW06010012BL	2B		7~13.2	3800	17.3	2.1	140	1.68	8····	3	33.0	
YW06010012BM	2B		7~13.2	4500	21.0	3.0	170	2.04	8····	2	38.0	
YW06010012BH	2B		7~13.2	52··	23.3	4.0	240	2.88	75···	1	41.0	

2B: 2-ball bearing D: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S

Function Available

- 1 6 5 4 3 2 7 8 9 10 11 14 12 13

PERFORMANCE P-Q CURVE

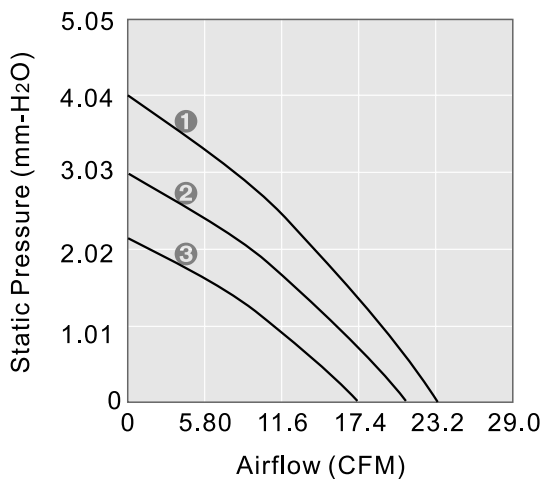

OUTLINE DIMENSIONS

