



60x60x15mm

- Airflow: 17.1~31.3 CFM
- Static Pressure: 2.0~5.3 mm-H₂O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #26 AWG
- Weight: 26.0 g

Model No.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Max. Airflow CFM	Max. Static Pressure mm-H ₂ O	Current mA	Power Consumption W	Life at 40°C L10 Hour	P-Q Curve	Noise Level dB(A)		
NYW06015012BL	2B	12	7~13.2	3200	17.1	2.0	100	1.20	8000	5	25.5		
NYW06015012BM	2B			4000	21.0	3.0	160	1.92	8000	4	33.0		
NYW06015012BH	2B			4700	24.1	3.9	220	2.64	7500	3	36.0		
NYW06015012BS	2B			5200	27.2	4.8	270	3.24	6500	2	40.0		
NYW06015012BSS2B	2B			6000	31.3	5.3	400	4.80	6500	1	43.0		
NYW06015012SL	S			3000	15.1	1.8	75	0.90	3000	5	24.0		
NYW06015012SM	S			3800	19.8	2.6	140	1.68	3000	4	31.0		
NYW06015012SH	S			4700	24.1	3.9	220	2.64	2500	3	36.0		
NYW06015024BL	2B			24	12~26.4	3200	17.1	2.0	90	2.16	8000	5	25.5
NYW06015024BM	2B					4000	21.0	3.0	110	2.64	8000	4	33.0
NYW06015024BH	2B	4700	24.1			3.9	145	3.48	7500	3	36.0		
NYW06015024SL	S	3000	15.1			1.8	90	2.16	3000	5	24.0		
NYW06015024SM	S	3800	19.8			2.6	110	2.64	3000	4	31.0		
NYW06015024SH	S	4700	24.1			3.9	145	3.48	2500	3	36.0		

2B: 2-ball bearing D: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S

Function Available

1 6 5 4 3 2 7 8 9 10 11 14 12 13

PERFORMANCE P-Q CURVE

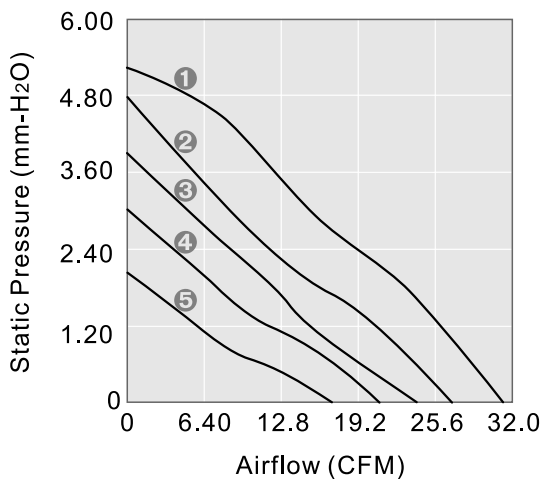

OUTLINE DIMENSIONS

