



# 60x60x20mm

- **Airflow:** 17.1~29.1 CFM
- **Static Pressure:** 2.4~7.0 mm-H<sub>2</sub>O
- **Blade / Housing:** Plastic Material UL 94V-0 P.B.T.
- **Lead Wire:** UL1007 #26 AWG
- **Weight:** 44.0 g

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VDC	VDC	RPM	CFM	mm-H <sub>2</sub> O	mA	W	Hour		dB(A)
YW06020012BL	2B	12	7~13.2	3000	17.1	2.4	80	0.96	8····	4	26.0
YW06020012BM	2B		7~13.2	3600	20.0	3.4	110	1.32	8····	3	30.5
YW06020012BH	2B		7~13.2	4200	22.9	4.4	160	1.92	75···	2	35.0
YW06020012BS	2B		7~13.2	5300	29.1	7.0	280	3.36	65···	1	41.0
YW06020012SL	S		7~13.2	2800	15.2	2.0	80	0.96	3····	4	25.0
YW06020012SM	S		7~13.2	3400	18.0	2.7	110	1.32	3····	3	28.0
YW06020012SH	S	7~13.2	4000	21.8	4.0	160	1.92	25···	2	35.0	
YW06020024BL	2B	24	12~26.4	3000	17.1	2.4	40	0.96	8····	4	26.0
YW06020024BM	2B		12~26.4	3600	20.0	3.4	70	1.68	8····	3	30.5
YW06020024BH	2B		12~26.4	4200	22.9	4.4	80	1.92	75···	2	35.0
YW06020024SM	S		12~26.4	3400	18.0	2.7	70	1.68	3····	3	28.0
YW06020024SH	S		12~26.4	4000	21.8	4.0	80	1.92	25···	2	35.0

2B: 2-ball bearing D: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

**Voltage Available**

05 12 24 48


**Bearing System Available**

2B L S

**Function Available**

- 1 6 5 4 3 2 7 8 9 10 11 14 12 13

**PERFORMANCE P-Q CURVE**

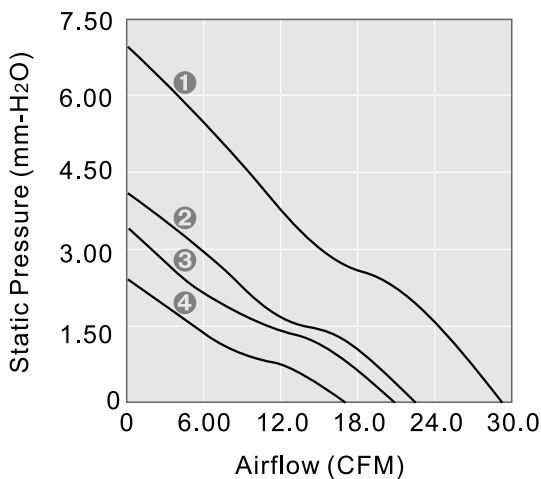

**OUTLINE DIMENSIONS**

