



# 70x70x10mm

- Airflow: 14.2~24.6 CFM
- Static Pressure: 1.1~3.0 mm-H<sub>2</sub>O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #26 AWG
- Weight: 35.0 g

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VDC	VDC	RPM	CFM	mm-H <sub>2</sub> O	mA	W	Hour		dB(A)
YW07010005BL	2B	05	4~5.5	2300	14.2	1.1	160	0.80	80000	4	24.0
YW07010005BH	2B	05	4~5.5	3000	19.6	2.0	260	1.30	75000	3	30.0
YW07010012BL	2B	12	7~13.2	3700	23.6	2.6	200	2.40	80000	2	35.0
YW07010012BM	2B	12	7~13.2	3900	24.6	3.0	220	2.64	75000	1	37.5

2B: 2-ball bearing D: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

**Voltage Available**

05 12 24 48


**Bearing System Available**

2B L S

**Function Available**

- 1 6 5 4 3 2 7 8 9 10 11 14 12 13

### PERFORMANCE P-Q CURVE

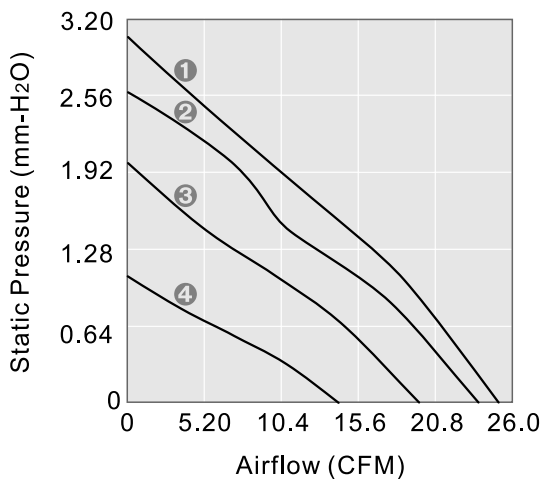

### OUTLINE DIMENSIONS

