



70x70x10mm

- Airflow: 23.7~30.8 CFM
- Static Pressure: 3.6~4.7 mm-H₂O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #26 AWG
- Weight: 35.0 g

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VDC	VDC	RPM	CFM	mm-H ₂ O	mA	W	Hour		dB(A)
HYW07010012BL	2B	12	7~13.2	3700	23.9	3.7	130	1.56	8····	3	31.0
HYW07010012BM	2B		7~13.2	4300	27.8	4.3	170	2.04	8····	2	34.5
HYW07010012BH	2B		7~13.2	4800	31.0	4.8	240	2.88	75···	1	37.0

2B: 2-ball bearing D: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S

Function Available

- 1 6 5 4 3 2 7 8 9 10 11 14 12 13

PERFORMANCE P-Q CURVE

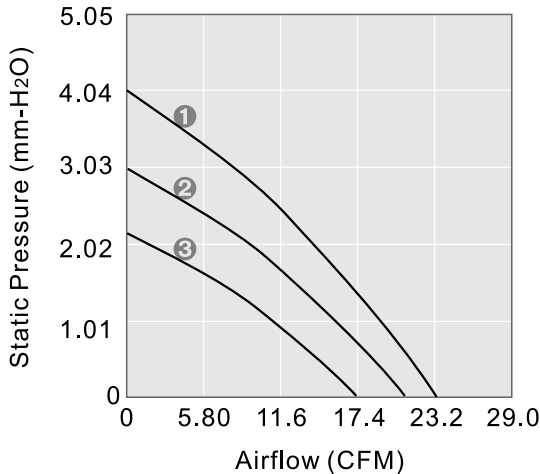

OUTLINE DIMENSIONS

