



80x80x25mm

- Airflow: 26.3~48.7 CFM
- Static Pressure: 2.0~5.8 mm-H₂O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #24 AWG
- Weight: 100 g

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VDC	VDC	RPM	CFM	mm-H ₂ O	mA	W	Hour		dB(A)
NYW08025012SL	S	12	7~13.2	2100	26.3	2.0	80	0.96	30000	6	26.0
NYW08025012SM	S		7~13.2	2600	32.7	3.1	130	1.56	30000	5	29.5
NYW08025012SH	S		7~13.2	3200	40.4	3.9	200	2.40	25000	4	35.5
NYW08025012SS	S		7~13.2	3500	46.0	5.2	250	3.00	20000	3	38.5
NYW08025012BL	2B		7~13.2	2300	28.8	2.2	80	0.96	65000	6	27.0
NYW08025012BM	2B		7~13.2	2900	36.9	3.6	130	1.56	80000	5	32.0
NYW08025012BH	2B	7~13.2	3400	41.6	4.5	180	2.16	75000	4	37.5	
NYW08025012BS	2B	7~13.2	3700	48.7	5.8	250	3.00	65000	3	39.5	
NYW08025012BSS2B	2B	7~13.2	4500	59.2	8.5	390	4.68	65000	2	44.0	
NYW08025012BU	2B	7~13.2	5500	64.1	12.5	500	6.00	65000	1	48.0	
NYW08025024BL	2B	24	12~26.4	2300	28.8	2.2	60	1.44	65000	6	27.0
NYW08025024BM	2B		12~26.4	2900	36.9	3.6	80	1.92	80000	5	32.0
NYW08025024BH	2B		12~26.4	3400	41.6	4.5	100	2.40	75000	4	37.5
NYW08025024BS	2B		12~26.4	3700	48.7	5.8	140	3.36	65000	3	39.5
NYW08025024BSS2B	2B		12~26.4	4500	59.2	8.5	230	5.52	65000	2	44.0
NYW08025048BM	2B		48	24~56.0	2900	36.9	3.6	45	2.16	80000	5
NYW08025048BH	2B	24~56.0		3400	41.6	4.5	80	3.84	75000	4	37.5
NYW08025048BS	2B	24~56.0		3700	48.7	5.8	85	4.08	65000	3	39.5

2B: 2-ball bearing D: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

Voltage Available

Bearing System Available


Function Available

05 12 24 48

2B L S

- 1 6 5 4 3 2 7 8 9 10 11 14 12 13

PERFORMANCE P-Q CURVE

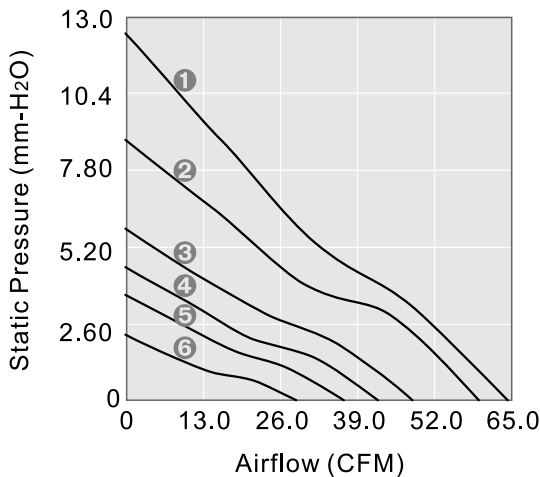

OUTLINE DIMENSIONS

