



92x92x32mm

- Airflow: 42.6~86.8 CFM
- Static Pressure: 3.5~14.3 mm-H₂O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #22 AWG
- Weight: 183.0 g

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VDC	VDC	RPM	CFM	mm-H ₂ O	mA	W	Hour		dB(A)
YW09232012BL	2B	12	7~13.2	2300	42.6	3.5	130	1.56	∧····	4	34.0
YW09232012BM	2B		7~13.2	3200	58.7	6.9	270	3.24	80···	3	42.5
YW09232012BH	2B		7~13.2	4000	73.3	10.7	490	5.88	75···	2	47.0
YW09232012BS	2B		7~13.2	4700	86.8	14.3	800	9.60	65000	1	51.0
YW09232024BL	2B	24	12~26.4	2300	42.6	3.5	90	2.16	∧····	4	34.0
YW09232024BM	2B		12~26.4	3200	58.7	6.9	170	4.08	80···	3	42.5
FYW09232024BH	2B		12~26.4	4000	73.3	10.7	260	6.24	75···	2	47.0
YW09232024BS	2B		12~26.4	4700	86.8	14.3	420	10.08	65000	1	51.0
YW09232048BL	2B	48	24~56.0	2300	42.6	3.5	70	3.36	∧····	4	34.0
YW09232048BM	2B		24~56.0	3200	58.7	6.9	120	5.76	80···	3	42.5
YW09232048BH	2B		24~56.0	4000	73.3	10.7	210	10.08	75···	2	47.0
YW09232048BS	2B		24~56.0	4700	86.8	14.3	280	13.44	65000	1	51.0

2B: 2-ball bearing D: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S

Function Available

- 1 6 5 4 3 2 7 8 9 10 11 14 12 13

PERFORMANCE P-Q CURVE

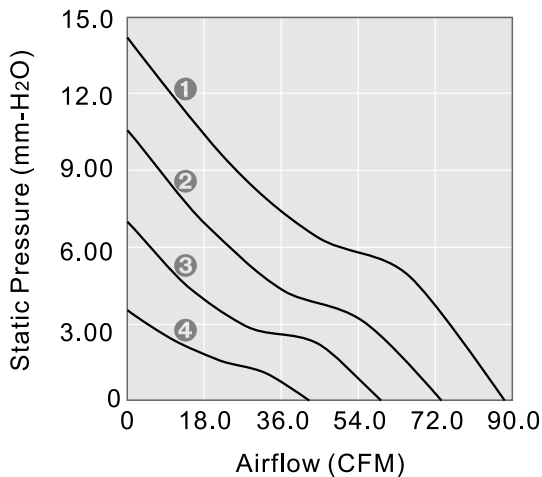

OUTLINE DIMENSIONS

