



120x120x38mm

- **Airflow: 88.0~142.0 CFM**
- **Static Pressure: 8.4~20.0 mm-H₂O**
- **Blade / Housing:**
Plastic Material UL 94V-0 P.B.T.
Frame: Die-Casting Aluminum
- **Lead Wire: UL1007 #22 AWG**
- **Weight: 396.8 g**

DC AXIAL FAN

DC BLOWER

XTREME SERIES

AC AXIAL FAN

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VDC	VDC	RPM	CFM	mm-H ₂ O	mA	W	Hour		dB(A)
XYW12038012BL-R 2B	12	12	7~13.2	2800	88.0	8.4	270	3.24	8····	5	45.5
XYW12038012BM-R 2B			7~13.2	3200	100.9	10.5	360	4.32	8····	4	47.0
XYW12038012BH-R 2B			7~13.2	3600	113.9	13.0	520	6.24	75···	3	51.0
XYW12038012BS-R 2B			7~13.2	4000	127.0	16.0	700	8.40	65···	2	55.0
XYW12038012BSS-R2B			7~13.2	4500	142.0	20.0	950	11.40	65···	1	58.5
XYW12038024BL-R 2B	24	24	12~26.4	2800	88.0	8.4	145	3.48	8····	5	45.5
XYW12038024BM-R 2B			12~26.4	3200	100.9	10.5	195	4.68	8····	4	47.0
XYW12038024BH-R 2B			12~26.4	3600	113.9	13.0	270	6.48	75···	3	51.0
XYW12038024BS-R 2B			12~26.4	4000	127.0	16.0	370	8.88	65···	2	55.0
XYW12038024BSS-R2B			12~26.4	4500	142.0	20.0	520	12.48	65···	1	58.5
XYW12038048BL-R 2B	48	48	24~56.0	2800	88.0	8.4	100	4.80	8····	5	45.5
XYW12038048BM-R 2B			24~56.0	3200	100.9	10.5	130	6.24	8····	4	47.0
XYW12038048BH-R 2B			24~56.0	3600	113.9	13.0	170	8.16	75···	3	51.0
XYW12038048BS-R 2B			24~56.0	4000	127.0	16.0	200	9.60	65···	2	55.0
XYW12038048BSS-R2B			24~56.0	4500	142.0	20.0	270	12.96	65···	1	58.5

2B: 2-ball bearing D: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S

Function Available

1 6 5 4 3 2 7 8 9 10 11 14 12 13

PERFORMANCE P-Q CURVE

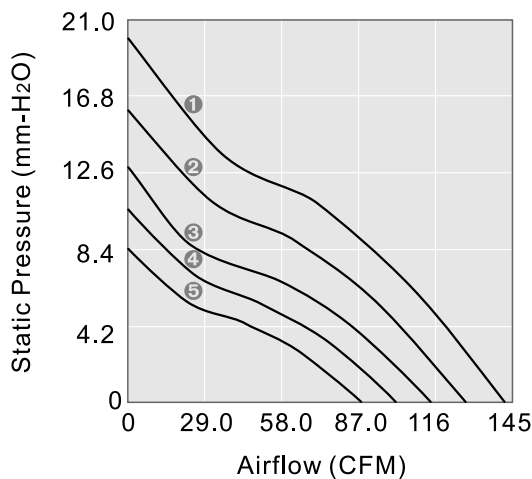

OUTLINE DIMENSIONS

