



40x40x28mm

- Airflow: 10.3~25.9 CFM
- Static Pressure: 7.9~39.0 mm-H₂O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #26 AWG
- Weight: 45.1 g

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VDC	VDC	RPM	CFM	mm-H ₂ O	mA	W	Hour		dB(A)
XYW04028012BL-Q 2B	12	12	7~13.2	5000	10.3	7.9	90	1.08	80000	7	24.5
XYW04028012BM-Q 2B			7~13.2	7000	13.0	12.0	150	1.80	80000	6	34.5
XYW04028012BH-Q 2B			7~13.2	8000	14.4	14.6	180	2.16	75000	5	37.5
XYW04028012BS-Q 2B			7~13.2	9500	16.5	18.9	260	3.12	65000	4	41.0
XYW04028012BE-Q 2B			7~13.2	11000	19.0	26.2	460	5.52	65000	3	47.0
XYW04028012BSS-Q2B			7~13.2	13000	21.4	31.9	550	6.60	65000	2	49.5
XYW04028012BU-Q 2B			7~13.2	16000	25.9	39.0	750	9.00	65000	1	51.5
XYW04028024BL-Q 2B	24	24	12~26.4	5000	10.3	7.9	80	1.92	80000	7	24.5
XYW04028024BM-Q 2B			12~26.4	7000	13.0	12.0	90	2.04	80000	6	34.5
XYW04028024BH-Q 2B			12~26.4	8000	14.4	14.6	160	3.84	75000	5	37.5
XYW04028024BS-Q 2B			12~26.4	9500	16.5	18.9	200	4.80	65000	4	41.0
XYW04028024BE-Q 2B			12~26.4	11000	19.0	26.2	280	6.72	65000	3	47.0
XYW04028024BSS-Q2B			12~26.4	13000	21.4	31.9	430	10.32	65000	2	49.5

2B: 2-ball bearing D: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S

Function Available

1 6 5 4 3 2 7 8 9 10 11 14 12 13

PERFORMANCE P-Q CURVE

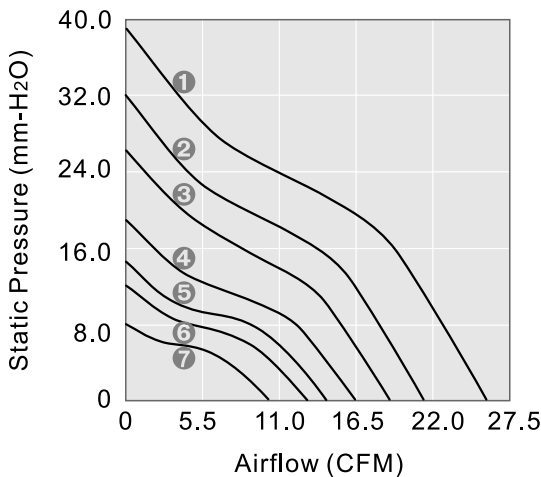

OUTLINE DIMENSIONS

