



80x80x38mm

- Airflow: 47.6~81.2 CFM
- Static Pressure: 7.5~20.5 mm-H₂O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #24 AWG
- Weight: 172.6 g

Model No.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Max. Airflow CFM	Max. Static Pressure mm-H ₂ O	Current mA	Power Consumption W	Life at 40°C L10 Hour	P-Q Curve	Noise Level dB(A)
XYW08038012BL	2B	12	7~13.2	3400	47.6	7.5	240	2.88	80000	4	41.5
XYW08038012BM	2B			4200	58.9	11.2	380	4.56	80000	3	47.0
XYW08038012BH	2B			4900	69.2	15.2	580	6.96	75000	2	51.5
XYW08038012BS	2B			5700	81.2	20.5	800	9.60	65000	1	55.0
XYW08038012BU	2B			8000	116.0	37.2	2000	24.0	65000	1	62.5
XYW08038024BL	2B	24	12~26.4	3400	47.6	7.5	130	3.12	80000	4	41.5
XYW08038024BM	2B			4200	58.9	11.2	200	4.80	80000	3	47.0
XYW08038024BH	2B			4900	69.2	15.2	280	6.72	75000	2	51.5
XYW08038024BS	2B			5700	81.2	20.5	420	10.08	65000	1	55.0
XYW08038024BS	2B			3400	47.6	7.5	80	3.84	80000	4	41.5
XYW08038048BL	2B	48	24~56.0	3400	47.6	7.5	80	3.84	80000	4	41.5
XYW08038048BM	2B			4200	58.9	11.2	110	5.28	80000	3	47.0
XYW08038048BH	2B			4900	69.2	15.2	150	7.20	75000	2	51.5
XYW08038048BS	2B			5700	81.2	20.5	200	9.60	65000	1	55.0
XYW08038048BS	2B			3400	47.6	7.5	80	3.84	80000	4	41.5

2B: 2-ball bearing D: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S

Function Available

1 6 5 4 3 2 7 8 9 10 11 14 12 13

PERFORMANCE P-Q CURVE

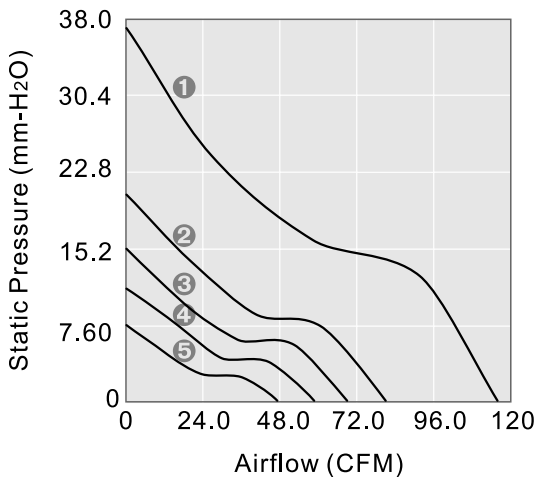

OUTLINE DIMENSIONS

