



60x60x15mm

- Airflow: 15.1~30.4 CFM
- Static Pressure: 2.0~6.9 mm-H₂O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #26 AWG
- Weight: 26.0 g

DC AXIAL FAN

DC BLOWER

XTRME SERIES

AC AXIAL FAN

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VDC	VDC	RPM	CFM	mm-H ₂ O	mA	W	Hour		dB(A)
NYW06015005SL	S	05	4~5.5	3000	14.3	1.7	110	0.55	30000	5	24.0
NYW06015005SM	S		4~5.5	3900	19.8	3.7	210	1.05	30000	4	33.5
NYW06015005SH	S		4~5.5	4700	23.9	4.5	320	1.60	25000	3	38.0
NYW06015012BL	2B	12	7~13.2	3200	15.2	2.0	100	1.20	80000	5	25.0
NYW06015012BM	2B		7~13.2	4000	20.3	3.9	160	1.92	80000	4	34.0
NYW06015012BH	2B		7~13.2	4700	23.9	4.5	220	2.64	75000	3	38.0
NYW06015012BS	2B		7~13.2	5200	26.4	5.0	270	3.24	65000	2	40.0
NYW06015012BSS	2B		7~13.2	6000	30.4	6.9	400	4.80	65000	1	43.0
NYW06015012SL	S		7~13.2	3000	14.3	1.7	80	0.96	30000	5	24.0
NYW06015012SM	S	24	7~13.2	3800	19.3	3.5	140	1.68	35000	4	33.0
NYW06015012SH	S		7~13.2	4700	23.9	4.5	220	2.64	25000	3	38.0
NYW06015012SS	S		7~13.2	5000	25.4	4.6	250	3.00	20000	2	39.0
NYW06015024BL	2B		12~26.4	3200	15.2	2.0	70	1.68	80000	5	25.0
NYW06015024BM	2B		12~26.4	4000	20.3	3.9	110	2.64	85000	4	34.0
NYW06015024BH	2B		12~26.4	4700	23.9	4.5	145	3.48	75000	3	38.0
NYW06015024BS	2B	24	12~26.4	5200	26.4	5.0	180	4.32	65000	2	40.0
NYW06015024SL	S		12~26.4	3000	14.3	1.7	90	2.16	30000	5	24.0
NYW06015024SM	S		12~26.4	3800	19.3	3.5	110	2.64	30000	4	32.8
NYW06015024SH	S		12~26.4	4500	23.6	3.9	120	2.88	25000	3	34.8
NYW06015024SS	S		12~26.4	5000	25.4	4.6	180	4.32	20000	2	39.0

2B: 2-ball bearing L: sintetico bearing S: sleeve bearing

Voltage Available

Bearing System Available


05 12 24 48

2B L S

Function Available

1 6 5 4 3 2 7 8 V 10 11 14 12 13

PERFORMANCE P-Q CURVE

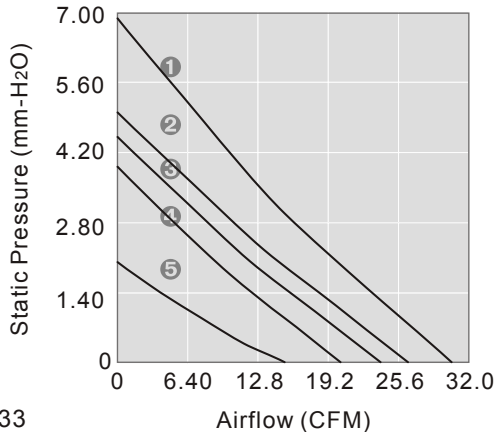

OUTLINE DIMENSIONS

